

Cat. No.	Finish	Lamps	Width	Height	Extension	Ballast(s) Type	Line Voltage
40600U	White	(2) 13W Quad Tube 4-Pin	11"	11"	3 1/4"	1-2 Lt. Electronic	120V/277V

Features

- 1. Diffuser:** One piece translucent white acrylic. Removable by pulling diffuser away from (4) diffuser clips.
- 2. Backplate:** Die formed 20 ga. steel. Semi-gloss white finish.
- 3. Ballast(s):** Electronic 120/277V. See chart for electrical specifications.
- 4. Diffuser Clips:** (4) .02 thick spring steel, zinc plated.

Labels

UL listed suitable for damp locations, I.B.E.W.

Lamping

Compact Fluorescent: 13W Quad Tube 4-Pin, G24q-1 base

General Electric	Osram/Sylvania	Phillips
F13 DBX/SPX*/4P	CF13DD/E/*	PL-C13W/*4p

*Manufacturers' color temperature designation.

Mounting

Fixture is provided with a cross bar suitable for direct mounting to most outlet boxes.

Electrical

Lampholders: Compact Fluorescent: 4-pin, G24q-1 base

Ballasts:	Electronic 120/277V
Total input Watts	30
Max. line Current (Amps)	0.25 / 0.11
Power Factor	>.97
Ballast Factor	>.98
THD	<10%
Min. Starting Temp.	-18°C (0°F)

Fixture conforms to Americans with Disabilities Act (ADA) Federal Regulations—Protruding Objects.

Job Information

Type:

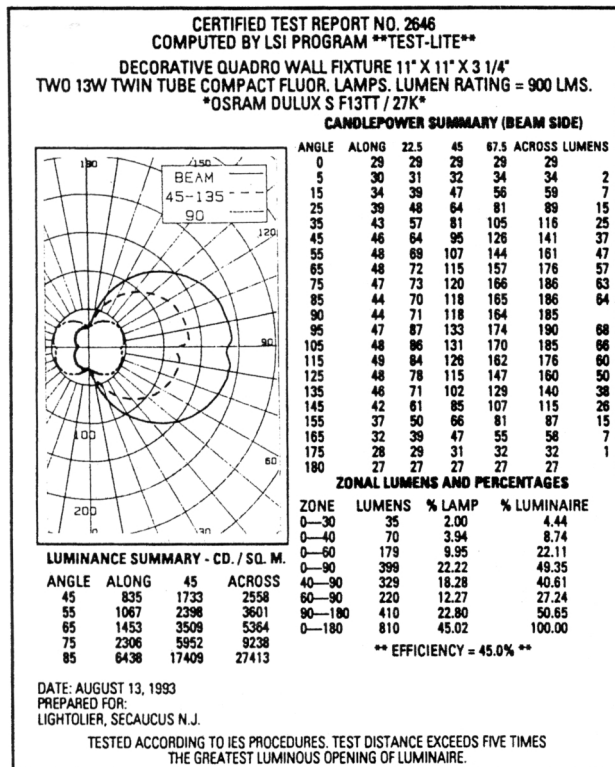
Job Name:

Cat. No.:

Lamp(s):

Notes:

Lighttolier a Genlyte Thomas Company www.lighttolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lighttolier Division) • A0902

**CORRIDOR LIGHTING**
Footcandles on Floor

10'	0.6	0.7	0.7	0.7	0.7	0.7	0.7
9'	0.7	0.8	0.8	0.8	0.8	0.8	0.8
8'	0.9	0.9	0.9	0.9	1.0	0.9	0.9
7'	1.0	1.1	1.1	1.1	1.1	1.1	1.0
6'	1.2	1.3	1.3	1.3	1.3	1.3	1.2
5'	1.4	1.5	1.6	1.6	1.6	1.5	1.4
4'	1.6	1.8	1.9	1.9	1.8	1.7	1.6
3'	1.8	2.0	2.1	2.2	2.1	2.0	1.8
2'	2.0	2.3	2.4	2.5	2.3	2.2	2.0
1'	2.1	2.5	2.7	2.7	2.5	2.3	2.1
0'	2.1	2.5	2.8	2.7	2.6	2.4	2.1
← Luminaire							
	1'	2'	3'	4'	5'	6'	7'

Footcandles values are initial.
Luminaire mounted 6'6" above floor.
Corridor is 8' wide by 8' high.
Room Reflectances: 80% Ceiling, 50% Walls, 20% Floor.
For multiple luminaires add together footcandles contributed by
each luminaire at point(s) desired.

Job Information**Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®